


SPLR-1 Precision Spotlight Handheld Remote Troubleshooting

If the handheld remote will not pair with the spotlight, remove the battery cover and the battery. There will be 2 pins on one side of the battery compartment, as shown below.



These two pins need to be in contact with the underside the battery. They should not be bent upward, in contact with the side of the battery as shown below.

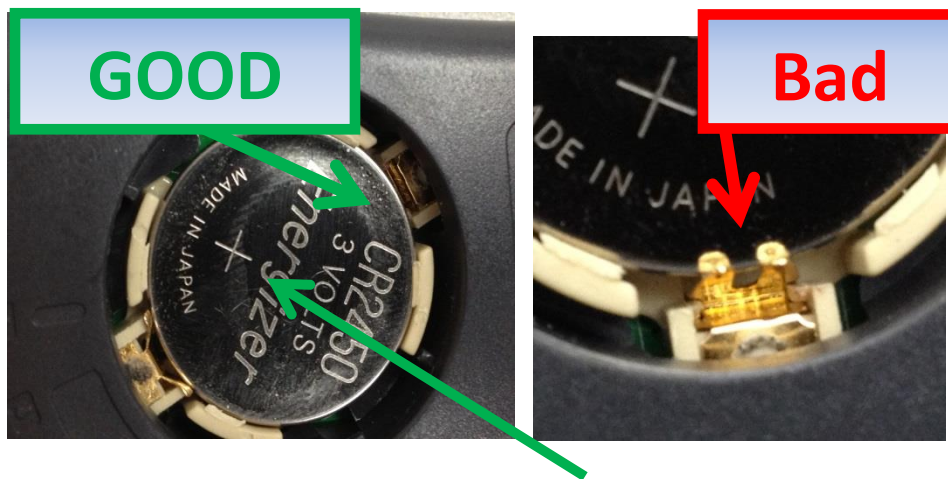

Also, verify that the PLUS symbol (+) or Positive side of the battery is facing up as in the above images.

Once the battery is installed properly, follow the instructions below for pairing the remote to the spotlight.

1. Turn off all power to the spotlight.

2. Press and hold the power button on the wireless remote.
3. While pressing the power button apply power to the spotlight.
4. After a few seconds you will hear the relay click and the light will turn on.
5. When the light turns on the pairing is complete, release power button.

If the handheld remote will not pair with the spotlight, follow the instructions below to verify the spotlight is functioning properly.

1. Turn off all power to the spotlight.
2. Connect the yellow and purple wires from the base of the spotlight together.
3. While the yellow and purple wires are connected, apply power to the spotlight.
4. After a few seconds the spotlight will begin to sweep.

If the spotlight sweeps, replace the battery in the handheld remote. If the spotlight does not sweep, check all connections to the spotlight.